




Technical manual

# SOLAR PANEL

Solar panel Mono, PERC, Half Cut, Black  
550Wp

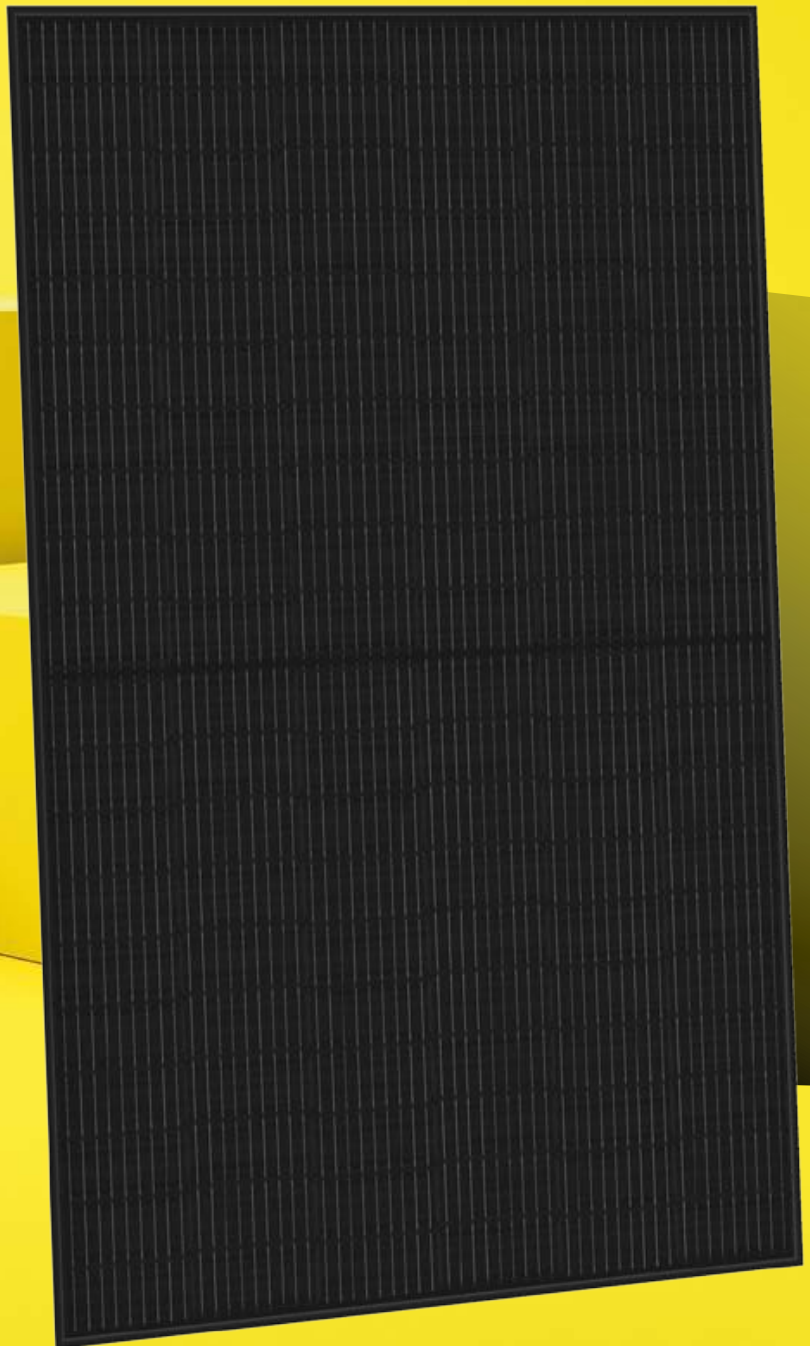

**EXS-550MHC-B**

# SOLAR PANEL

Solar panel Mono, PERC, Half Cut, Black  
550Wp

## ELERIX solar panel Mono, PERC, Half Cut, Black 550Wp

### Key Features



Excellent module efficiency up to: 21.30%



IP68 junction box for long-term weather endurance



Heavy snow load up to 5400 Pa, wind load up to 3600 Pa



PID: Selected material and stringent quality system ensure PID free



Applicable to harsh environment of deserts, farmlands and seashores



Much lower risk of Hot Spot

### Warranty


Linear power output warranty

30 years

- ▶ 12 years minimum 92% power output
- ▶ 30 years minimum 83% power output

12 years

Product warranty on materials and workmanship  
According to the applicable ELERIX Limited Warranty Statement

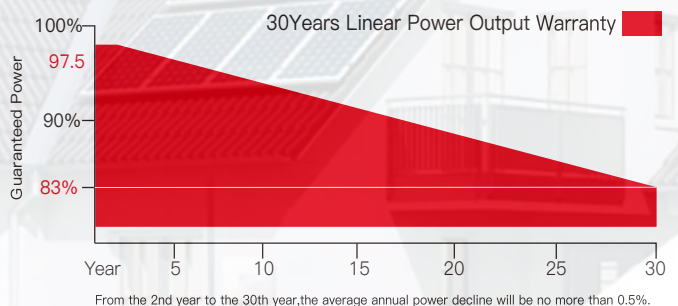


### Certification




# SOLAR PANEL


Solar panel Mono, PERC, Half Cut, Black  
550Wp

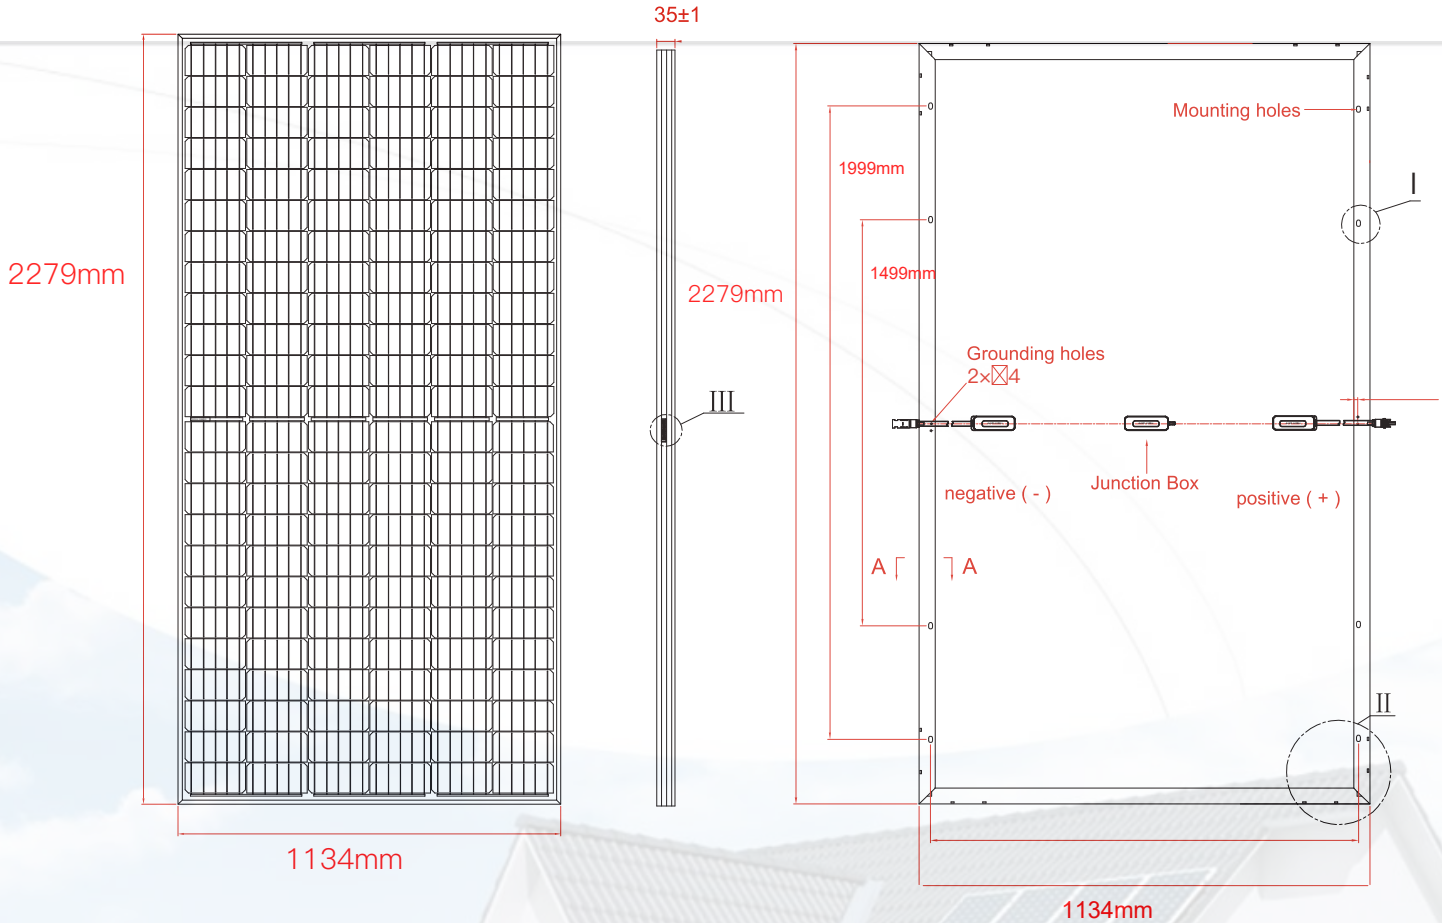


1/5:1



II/2:1



Section A-A  
10:1





# SOLAR PANEL



Solar panel Mono, PERC, Half Cut, Black  
550Wp

## IV Curve

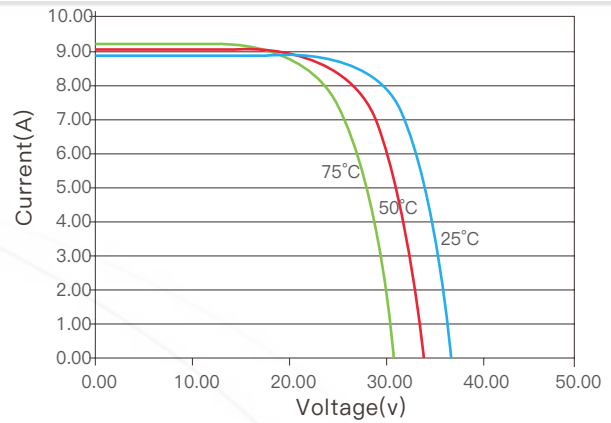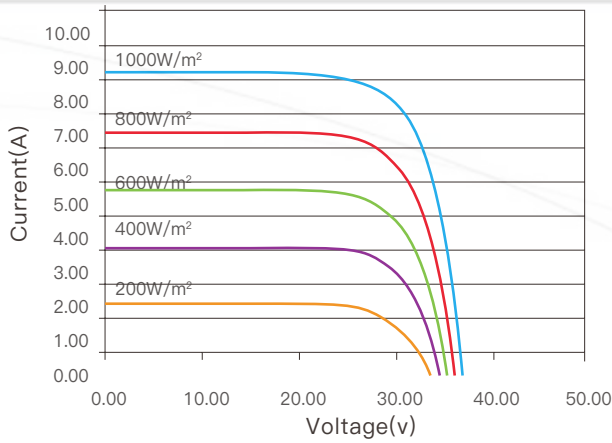

Electrical Specification	EXS-550MHC-B
Maximum Power (Pmax)	550W
Module Efficiency	21.30%
Open Circuit Voltage (Voc)	49.85V
Short Circuit Current (Isc)	13.97A
Maximum Power Voltage (Vmp)	42.00V
Maximum Power Current (Imp)	13.10A
Maximum System Voltage	ICE 1500V (VDC)/UL 1500V (VDC)
Maximum Series Fuse Rating	25A

STC: Irradiance: 1000W/m<sup>2</sup>, Module Temperature: 25°C, Air Mass: 1.5

# SOLAR PANEL

Solar panel Mono, PERC, Half Cut, Black  
550Wp



Electrical DATA@NOCT	EXS-550MHC-B
Pmax [W]	405
Vm [V]	38.42
Imp [A]	10.65
Voc [V]	46.84
Isc [A]	11.33

NOCT: Irradiance: 800W/m<sup>2</sup>, Ambient Temperature: 20°C, Air Mass: 1.5, Wind Speed: 1m/s

Mechanical Specification	
Solar Cell Type	Mono Crystalline 182x91mm
Number of Cells	144pcs (24x6)
Module Size	2279x1134x35mm
Weight	28.5kg
Glass	3.2mm tempered glass
Back Sheet	Black
Frame	Anodized aluminum alloy, Black
Junction Box	IP68
Quantity of Diodes	3pcs
Cable	4.0mm <sup>2</sup> 1100mm
Connector	MC4 Compatible
Wind/Snow Load	3600pa/5400pa

# SOLAR PANEL

Solar panel Mono, PERC, Half Cut, Black  
550Wp



## Packaging Configuration

Modules per box	31 pcs
Number per 20GP	186 pcs
Modules per 40' HQ	620 pcs

## Temperature Characteristic

NMOT (Nominal Module Operating Temperature)	41°C (±3°C)
Temperature Coefficient of P <sub>MAX</sub>	- 0.36%/°C
Temperature Coefficient of U <sub>oc</sub>	- 0.26%/°C
Temperature Coefficient of I <sub>sc</sub>	0.04%/°C

## Maximum Ratings

Operational Temperature	-40 to +85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	25A
Snow Load	54000Pa (3600Pa)
Wind Load	3600Pa (1600Pa)

\*design load with safety factor 1.5 (DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

